


Insertion support leg E2

Technical facts

- Insertion support: Support length 230 mm (150 mm ground clearance)
- Aluminium tube 18 x 4,65 for type E2.1/E2.3 and E2.4: aluminium insertion support and stainless steel blank with clip-on nylon plate (screwed together).
- Stainless steel tube 18 x 1 with threaded insert for type E2.5: insertion support and foot blank in stainless steel with clip-on nylon plate (screwed together).
- Flat rosette: Aluminium anodised for type E2.4, stainless steel for type E2.5
Nylon (4 colours – find colour chart enclosed) for type E2.1 and E2.3
- Rosette with short shaft: Nylon (11 colours – find colour chart enclosed) for type E2.1 and E2.3

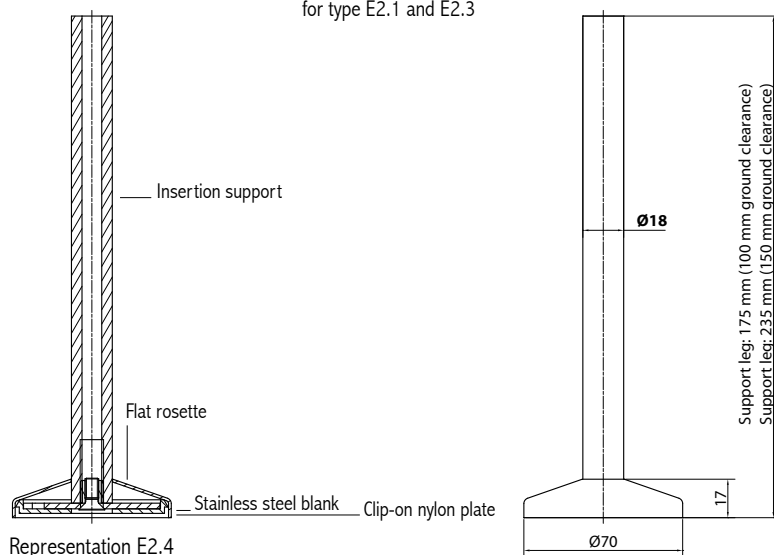

Representation E2.4



Article	Description	Order number
E2.1 FL	Complete support leg (support: aluminium anodised, flat rosette: nylon)	81E21FL_ _ _ _ (Please specify RAL no.!)
E2.1 KS	Complete support leg (support: aluminium anodised, short shaft rosette: nylon)	81E21KS_ _ _ _ (Please specify RAL no.!)
E2.3 FL	Complete support leg (support: aluminium powder-coated, flat rosette: nylon)	81E23FL_ _ _ _ (Please specify RAL no.!)
E2.3 KS	Complete support leg (support: aluminium powder-coated, short shaft rosette: nylon)	81E23KS_ _ _ _ (Please specify RAL no.!)
E2.4	Complete support leg (support and flat rosette: aluminium anodised)	81E24
E2.5	Complete support leg (support and flat rosette: ground stainless steel)	81E25
Support foot	Aluminium insertion support: aluminium anodised and stainless steel blank (without rosette)	81E21GF
Support foot	Aluminium insertion support: aluminium powder-coated and stainless steel blank (without rosette)	81E23GF
Support foot	Stainless steel insertion support and stainless steel blank (without rosette)	81E25GF

Notes
