

Wood screw support leg L2 (with protection tube)


Technical facts

Support foot: Steel galvanised or stainless steel only 12 x 260 (additional charge)
12 x 260 (150 mm ground clearance) incl. clip-on nylon plate
12 x 200 (100 mm ground clearance) incl. clip-on nylon plate

Protection tube: Aluminium raw, aluminium anodised, aluminium powder-coated
Nylon (2 colours – find colour chart enclosed)
Stainless steel (each with $\varnothing 18$ mm)

Flat rosette: Aluminium raw, aluminium anodised, stainless steel,
Nylon (4 colours – find colour chart enclosed)

Rosette with short shaft: Nylon (11 colours – find colour chart enclosed)

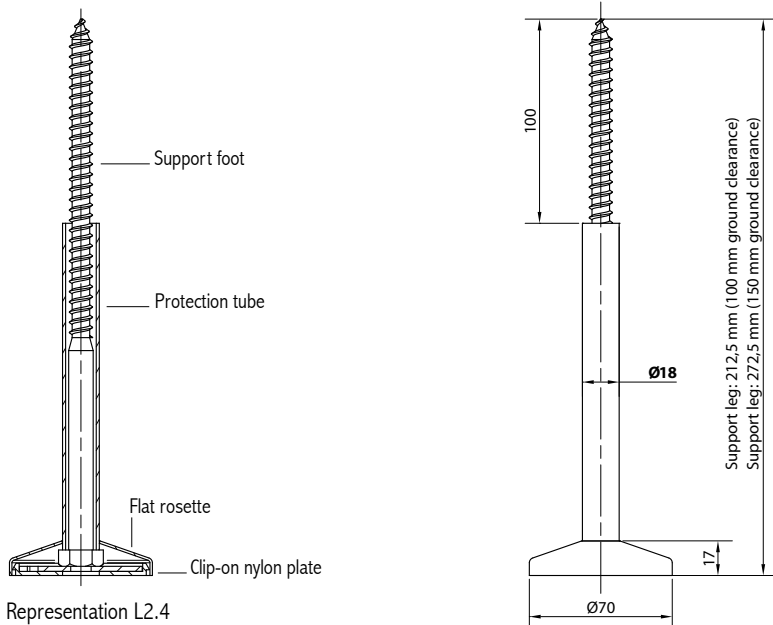

Representation L2.4

Prices for 150 mm and 100 mm ground clearance.

Article	Description	Order number
L2.1	Complete support leg (protection tube: aluminium anodised, flat rosette or short shaft rosette: nylon)	81L21_ _ _ _ _ (Please specify RAL no.!)
L2.2	Complete support leg (protection tube and flat rosette: nylon)	81L22_ _ _ _ _ (Please specify RAL no.!)
L2.3	Complete support leg (protection tube: aluminium powder-coated, flat rosette or short shaft rosette: nylon)	81L23_ _ _ _ _ (Please specify RAL no.!)
L2.4 raw	Complete support leg (protection tube, flat rosette and short shaft: aluminium raw)	81L240
L2.4	Complete support leg (protection tube, flat rosette and short shaft: aluminium anodised)	81L24
L2.5	Complete support leg (protection tube and flat rosette: ground stainless steel)	81L25
Additional charge	Support foot in stainless steel 12 x 260	MP81GFLES



Notes
