


Screw-on support leg A2 (13 mm panel thickness)

Technical facts

Support foot:	Steel galvanised or stainless steel (additional charge) M10 x 45 (including clip-on nylon plate)
Screw-on support:	Aluminium anodised – Ø 18 mm with screw-on mounting part Aluminium powder-coated – Ø 18 mm with screw-on mounting part Stainless steel – Ø 18 mm with screw-on mounting part Support length: 110 mm (150 mm ground clearance)
Short shaft and flat rosette:	Aluminium anodised for type A2.4, stainless steel for type A2.5
Rosette with short shaft:	Nylon (11 colours – find colour chart enclosed) for type A2.1 and A2.3

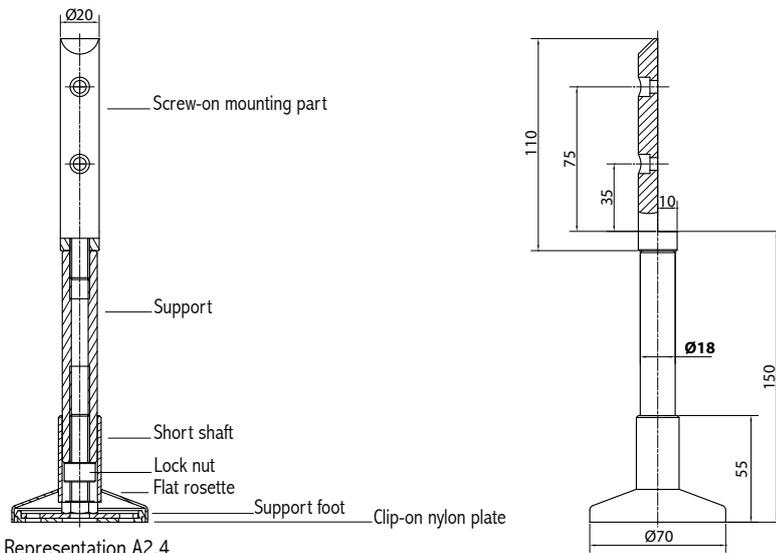

Representation A2.4

Prices for 150 mm and 100 mm ground clearance.

Article	Description	Order number
A2.1	Complete support leg (support: aluminium anodised, short shaft rosette: nylon)	81A21_---- (Please specify RAL no.!)
A2.3	Complete support leg (support: aluminium powder-coated, short shaft rosette: nylon)	81A23_---- (Please specify RAL no.!)
A2.4 raw	Complete support leg (support, flat rosette and short shaft: aluminium raw)	81A240
A2.4	Complete support leg (support, flat rosette and short shaft: aluminium anodised)	81A24
A2.5	Complete support leg (support, flat rosette and short shaft: ground stainless steel)	81A25
Additional charge	Support foot in stainless steel	MP81GFES
Additional charge	Excess- and Short length aluminium support (to 200 mm ground clearance)	MP81RUUEV
Additional charge	Excess- and Short length stainless steel support (up to 200 mm ground clearance)	MP81RUUES
Additional charge fixation-set 1	Cylinder head screw (SS) M6 x 12 incl. screw cover	MP81AS1
Additional charge fixation-set 2	Sleeve nut without slit (SS) and cylinder head screw (SS) M6 x 12 incl. screw cover	MP81AS2



Notes
