


## Screw-in support leg R2

### Technical facts

Support foot:	Steel galvanised or stainless steel (additional charge) M10 x 45 (including clip-on nylon plate)
Screw-in support:	Aluminium anodised, aluminium powder-coated, stainless steel (each with $\varnothing 18$ mm) with different threaded pin: M8; M10; M12 or with screw-on plate P in aluminium anodised (additional charge) Support length: 110 mm (150 mm ground clearance)
Short shaft and flat rosette:	Aluminium anodised for type R2.4, stainless steel for type R2.5
Rosette with short shaft:	Nylon (11 colours – find colour chart enclosed) for type R2.1 and R2.3

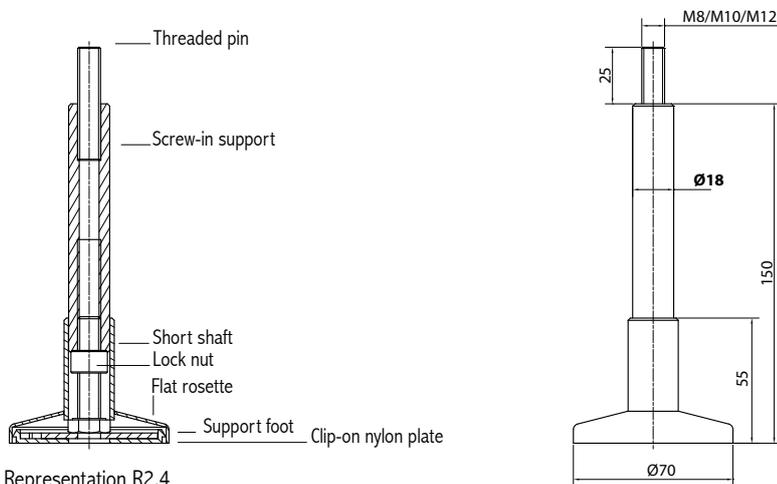

Representation R2.4



### Prices for 150 mm and 100 mm ground clearance.

Article	Description	Order number
R2.1	Complete support leg (support: aluminium anodised, short shaft rosette: nylon)	81R21_ _ _ _ _ (Please specify RAL no.!)
R2.3	Complete support leg (support: aluminium powder-coated, short shaft rosette: nylon)	81R23_ _ _ _ _ (Please specify RAL no.!)
R2.4 raw	Complete support leg (support, flat rosette and short shaft: aluminium raw)	81R240
R2.4	Complete support leg (support, flat rosette and short shaft: aluminium anodised)	81R24
R2.5	Complete support leg (support, flat rosette and short shaft: ground stainless steel)	81R25
Additional charge	Support foot in stainless steel	MP81GFES
Additional charge	Screw-on plate P 25 x 70 mm	MP81P
Additional charge	Excess- and Short length aluminium support (up to 200 mm ground clearance)	MP81RUUEV
Additional charge	Excess- and Short length stainless steel support (up to 200 mm ground clearance)	MP81RUUES

### Notes

---



---



---



---



---



---



---



---



---



---